Pacific Northwest
NATIONAL LABORATORY
Proudly Operated by Battelle Since 1965

NSUF Partner Facility Capabilities at the Pacific Northwest National Laboratory

DJ SENOR

Pacific Northwest National Laboratory, Richland, WA, USA

NSUF User Meeting, Idaho Falls, ID

MSTL

Overview

- PNNL's NSUF Partner Facility contributions include three broad capability areas
  - Irradiated fuel and high-activity structural materials post-irradiation examination and testing – Radiochemical Processing Laboratory (RPL)
  - Irradiated low-activity structural materials post-irradiation examination and testing – Materials Science and Technology Laboratory (MSTL)
  - Irradiation experiment design, analysis, and fabrication

RPL

Receipt

- PNNL has recent experience with a number of US NRC licensed casks, including the NAC LWT, GE-2000, and PAS-1
- If activity levels permit, sample receipt in Type A shipping containers is very straightforward and far less expensive

PAS-1

NAC LWT

GE-2000

Cask Receipt and Unloading

- Casks are typically received and unloaded at the RPL's High Level Radiochemistry Facility (HLRF)
  - High-density concrete shield walls (1.2 m thick)
  - Viewing provided by six lead-glass windows (total thickness 1.2 m) optically coupled with mineral oil
  - Each window has a pair of heavy-duty Model E manipulators
  - A-cell – Used for receiving – 4.5 m wide x 2.6 m deep x 5.2 m tall
  - Horizontal loading through 0.5 m diameter port
  - B-cell and C-cell – Used for size reduction – 1.8 m wide x 2.6 m x 5.2 m
  - All three cells interconnected for easy transfer

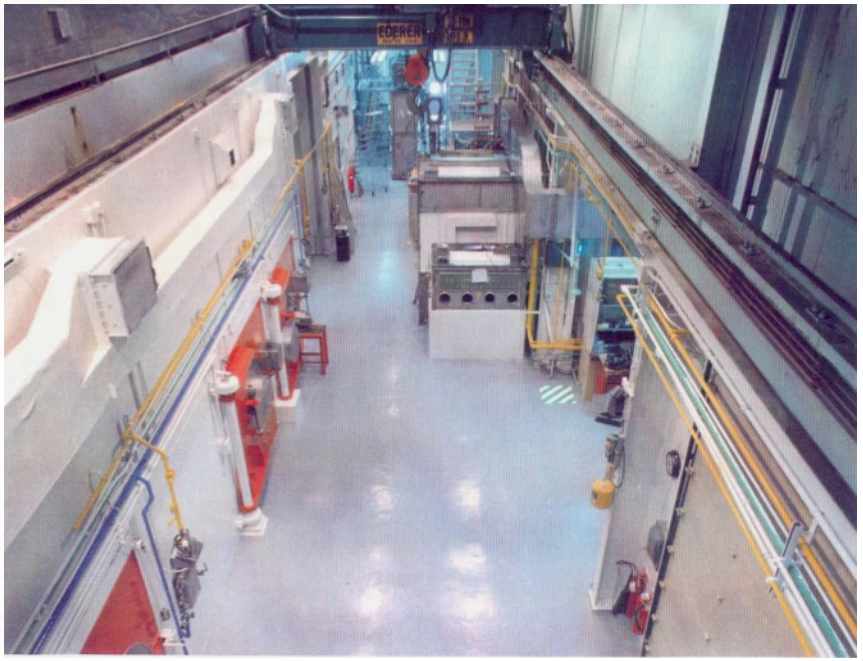

Rod Puncture, Gas Analysis, and Gamma Spectroscopy

- Mechanical rod puncture
- Gas collection and online analysis system
  - Gamma energy analysis for radioactive gases
  - Mass spectrometry for non-radioactive gases
  - Can also quantify beta-emitting gases (e.g. tritium)
  - Total pressure determination
- Gamma spectroscopy with translating table
  - Axial resolution 2.5 mm
  - Maximum segment length 1.5 m

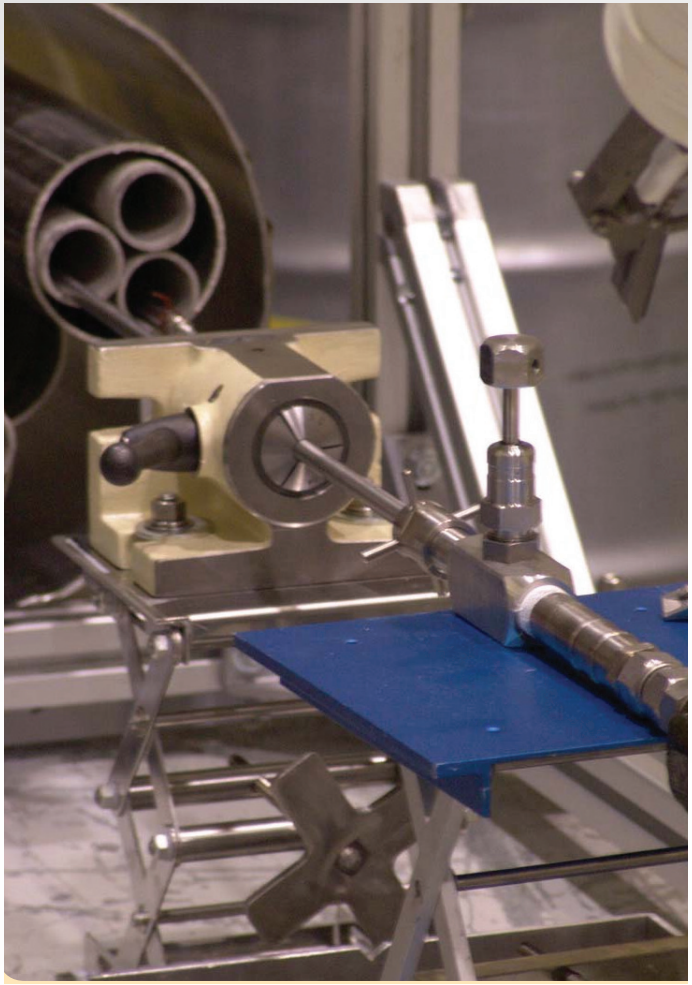

Visual Examination

- During receipt or subsequent handling activities in HLRF, visual examinations are routinely conducted using high-resolution photography and videography
- Cameras mounted in-cell or positioned with manipulators

High-resolution in-cell photograph of failed fuel rodlet with centerline thermocouple

High-resolution video capture of a zircaloy-clad fuel rodlet with Pb-Bi eutectic on the exterior, held in manipulator fingers

Initial Size Reduction

- Conducted in the HLRF hot cells
  - Cutting with low-speed metallographic saws or tubing/pipe cutters
  - Core drilling
  - Other similar size reduction operations with modified tabletop or hand tools

Cutting open a Ti capsule with modified pipe cutter

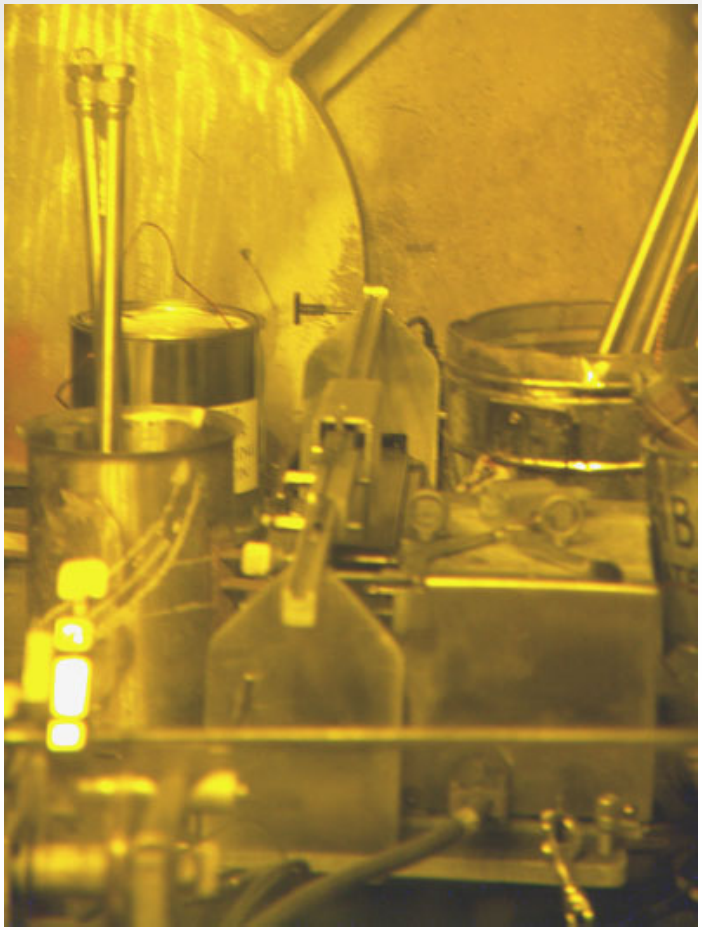

Longitudinal slitting of a tritium-producing burnable absorber rod

Precision Sectioning

- Precision sectioning to extract samples is conducted in either the Shielded Analytical Laboratory or a modular hot cell, depending on activity and availability
- Shielded Analytical Laboratory (SAL)
  - Six interconnected hot cells
  - 1.7 m wide x 1.7 m deep x 5.2 m tall
  - Shield walls are 1 m thick concrete and steel
- Modular hot cells
  - Two cells 1.7 m wide x 1.5 m deep x 3.7 m tall
  - One cell 3.0 m wide x 1.5 m deep x 3.7 m tall
  - One cell 2.1 m wide x 1.5 m deep x 3.7 m tall
  - Shield walls are 30 cm steel
  - Large access doors for easy equipment installation/removal

Thermal Properties

- Thermal property measurements are routinely conducted, with individual capabilities located in SAL and modular hot cells
- Thermal diffusivity (α), specific heat (c_p), and density (ρ) data are combined to provide thermal conductivity (k)

$$k = \alpha c_p \rho$$

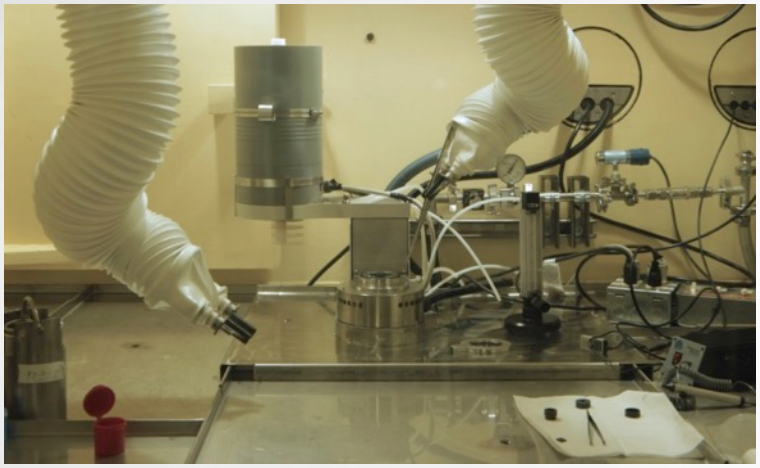

Thermal Diffusivity via Laser Flash Analysis
Netzsch LFA 457

Specific Heat via DSC
Perkin Elmer Pyris 1

Density via He Pycnometry
Micromeritics AccuPyc 1300

Mechanical Properties

- Bulk tensile properties of high-activity materials obtained using a load frame installed in one of the modular hot cells
  - Instron 8800
  - 9800 N and 98,000 N load cells
  - Designed for miniature sample testing

- Hardness and Elastic Modulus
  - Nanosurf LensAFM attachment on a Nikon E400 POL microscope
  - Existing capability for topographic analysis
  - New capability being developed for micron-scale hardness and elastic modulus mapping

Mechanical Properties

- Tensile properties of low-activity materials obtained using a load frame in a walk-in fume hood
  - Centorr 2500°C W-mesh furnace
- Fracture toughness of low-activity materials
  - Benchtop Instron 8801 servo-hydraulic load frame with 800°C tube furnace

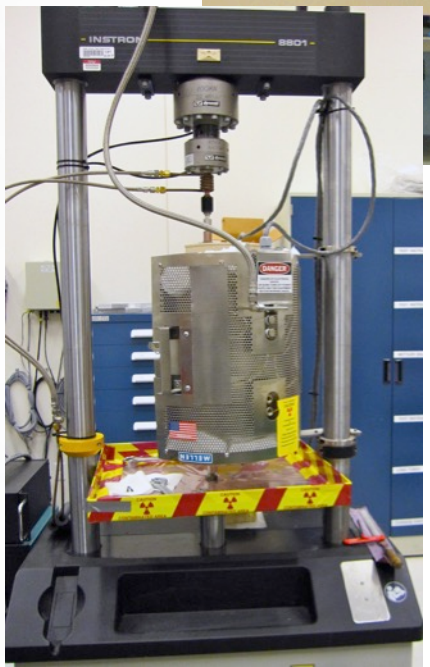

Optical and Scanning Electron Microscopy

- Fully-automated and remote-operated Nikon 200MA optical microscope
- FEI Quanta250 FEG SEM with EDS/WDS/EBSD
- JEOL 7600 SEM with EDS/WDS/EBSD
- Powder x-ray diffraction

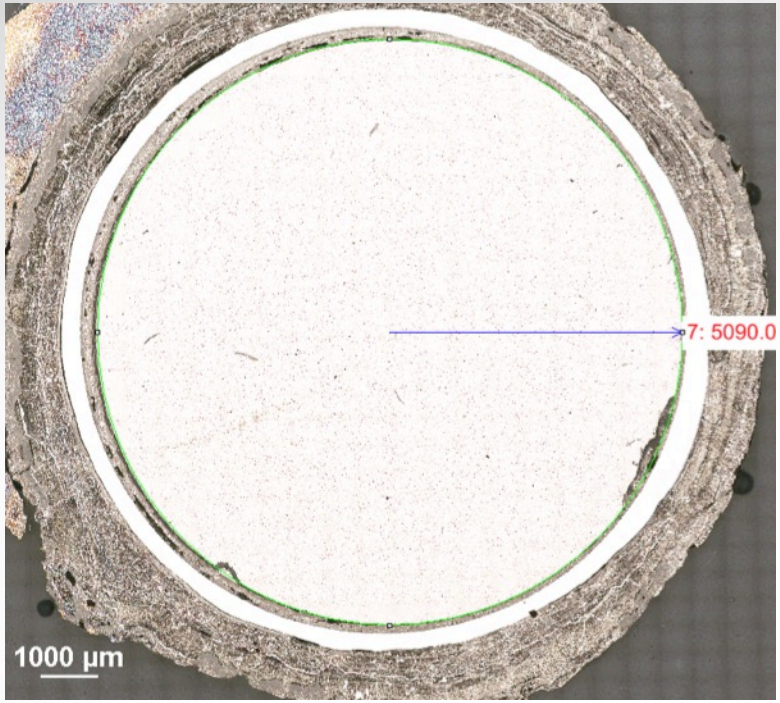

Full-round UZrHx fuel rodlet showing fuel pellet, inner Pb-Bi bond, Zircaloy-4 cladding, and outer Pb-Bi bond. Mosaic composed of over 500 individual high-magnification images

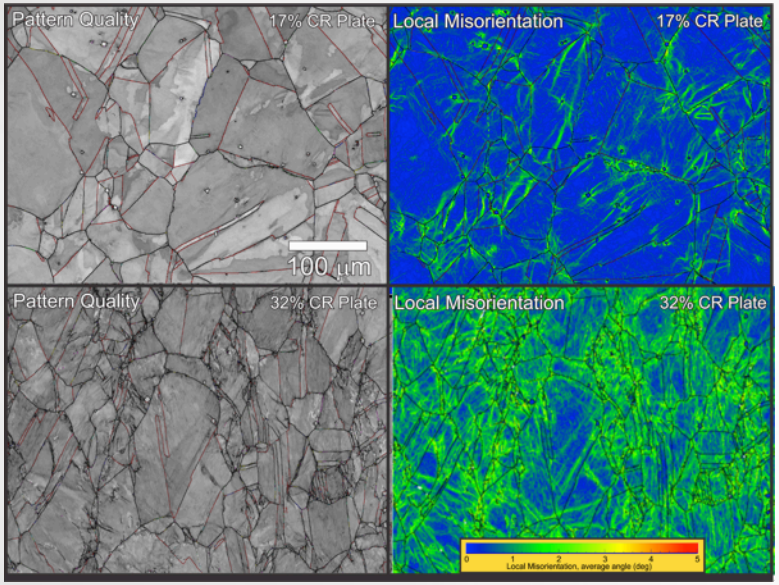

Using EBSD to image strain gradients and twins due to local misorientation in cold rolled Ni-base alloy

SEM with Focused Ion Beam

- FEI Helios 660 Nanolab dual beam focused ion beam (FIB) SEM
  - For use on fuel, high-activity, and dispersible radioactive materials
- FEI Quanta 3D FEG dual beam FIB SEM
  - For use on low-activity, non-dispersible materials

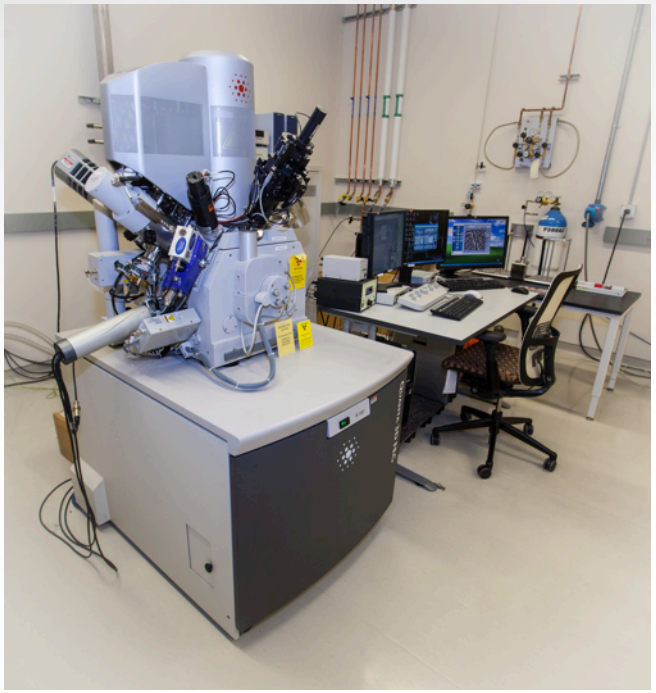

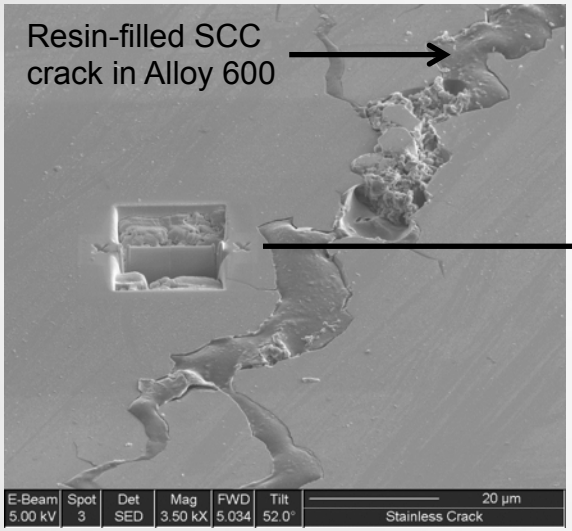

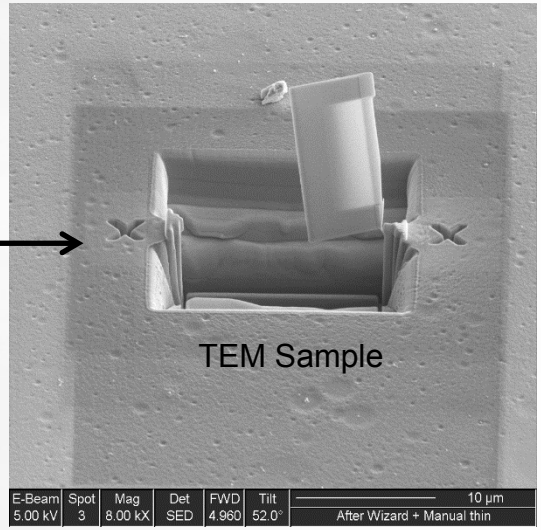

Transmission Electron Microscopy

- FEI Tecnai 330 keV TEM with EDS and Gatan ORIUS digital camera
- JEOL ARM 200CF aberration-corrected TEM with EELS

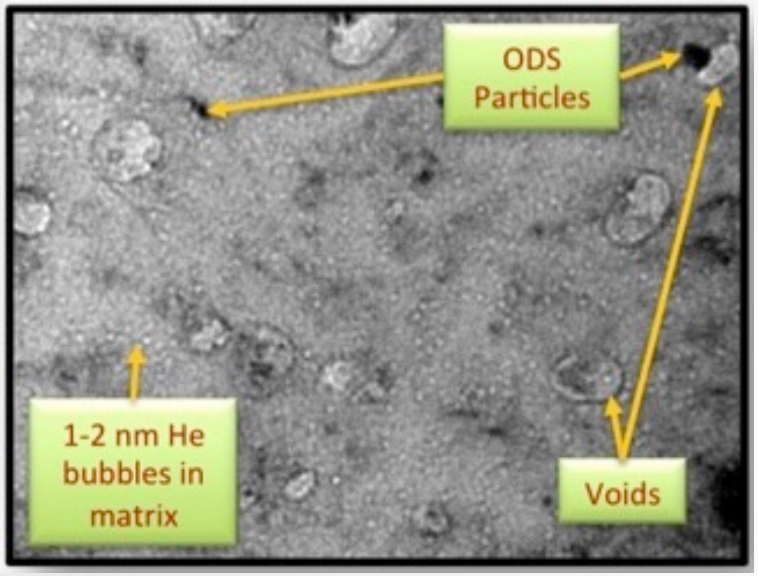

Nanostructured ferritic alloy simultaneously neutron irradiated and helium injected, imaged by the JEOL ARM 200CF TEM

Fission Gas Analysis

- Thermo-gravimetric/differential thermal analysis
  - Seiko 320 TG/DTA
  - Pfeiffer Thermostar mass spectrometer (1 amu resolution)
  - Both modified for in-cell use

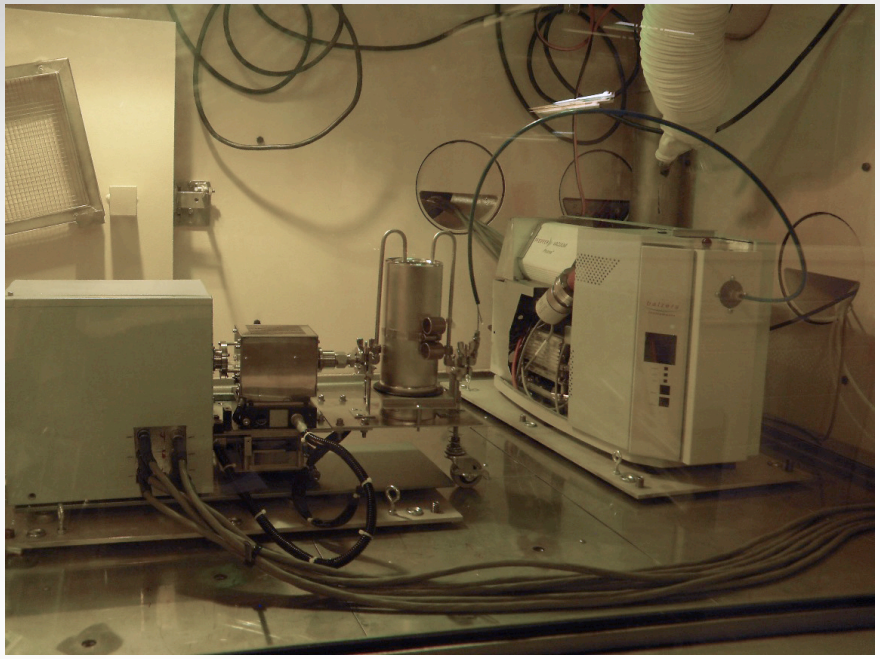

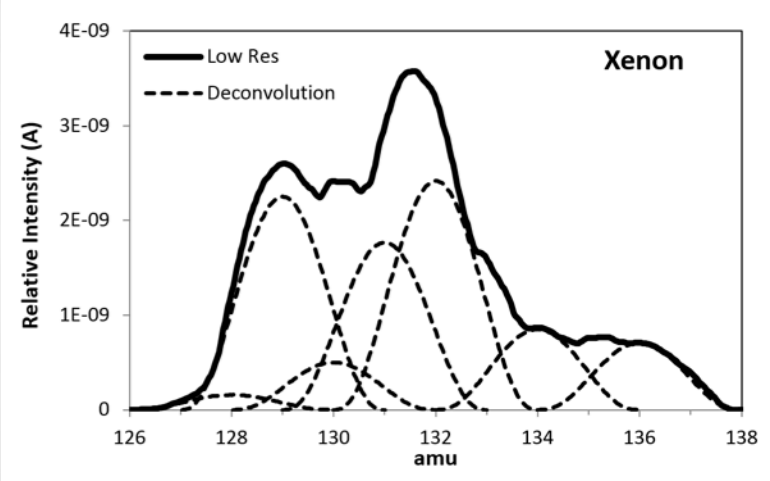

Stable Xe Isotopes amu	Natural Abundance %	Measured %
128	1.9	1.8
129	26.4	26.0
130	4.1	5.8
131	21.2	20.4
132	26.9	27.9
134	10.4	9.8
136	8.9	8.2

Analytical Chemistry

- Helium mass spectrometry
  - Measures ^{3}He and ^{4}He in parts-per-trillion concentrations in steels and other materials (~10^{8} atoms detection limit)
- Hydrogen isotope mass spectrometry
  - Measures individual hydrogen isotope concentrations to ppm levels
- TIMS
  - Useful for measuring isotopic abundance to determine burnup
- ICP-OES
- ICP-MS
- Gas mass spectroscopy
- Ion chromatography
- NMR spectroscopy (300 MHz)
- Raman spectrophotometry

Surface Science

- Four Physical Electronics Systems
  - Auger Electron Spectroscopy
  - X-ray Photoelectron Spectroscopy
  - Secondary Ion Mass Spectroscopy
  - Scanning capability
  - Spatial resolution from 0.1 to 50 μm
- Fourier Transform Infrared Spectroscopy

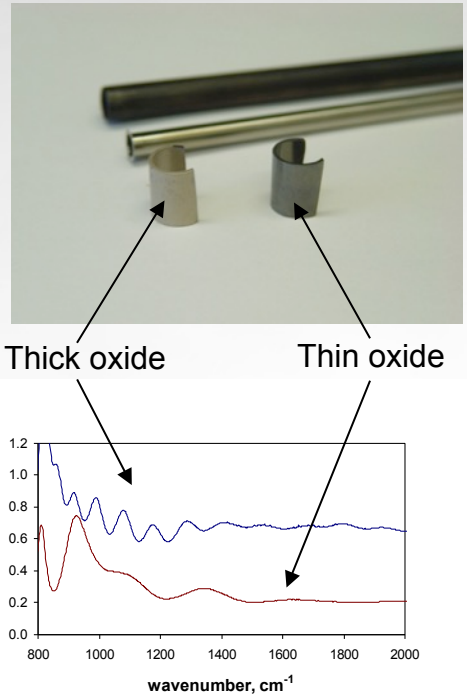

Measurement of oxide thickness on Zircaloy-4 tubes by FTIR

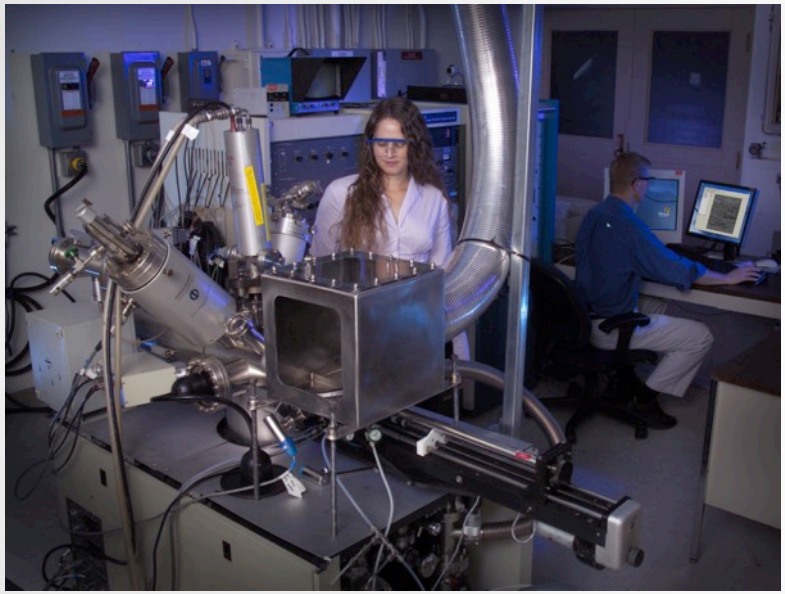

Physical Electronics 560 for scanning AES, XPS, and SIMS on radioactive samples

Reactor Dosimetry

- Flux wires
  - A combination of mg-size pieces of very pure metals that have (n,γ) reactions
    - Distinct gammas
    - Covers the spectrum of interest
  - Typically encased in a low-activation capsule (e.g. V) so they can be counted via gamma spectroscopy without disassembly after irradiation
  - Using appropriate codes (e.g. STAYSL) along with good spectra, the energy-dependent fluence can be reconstructed from flux wire activation
  - Subsequent calculations (e.g. SPECTER) can be done to convert fluence to dpa
  - In the absence of flux wires (or in addition to them) sections of the irradiation capsule can be used to provide dosimetry data

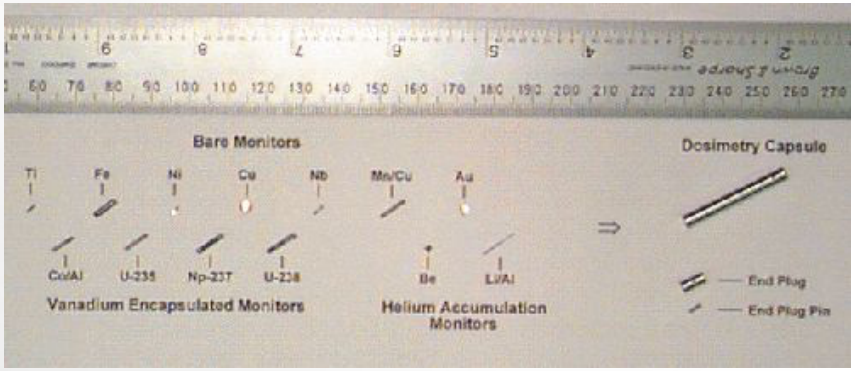

Irradiation Experiment Design, Analysis, and Fabrication

Pacific Northwest NATIONAL LABORATORY
Proudly Operated by Battelle Since 1965

- PNNL has capabilities and experience designing and fabricating experiments irradiation in ATR
  - Neutronics
  - Thermal-hydraulics
  - Structural engineering
  - Both lead and drop-in experiments
  - High precision machining and weld capabilities
  - NRC- and INL-approved 10 CFR 50 Appendix B and ASME NQA-1 quality assurance programs

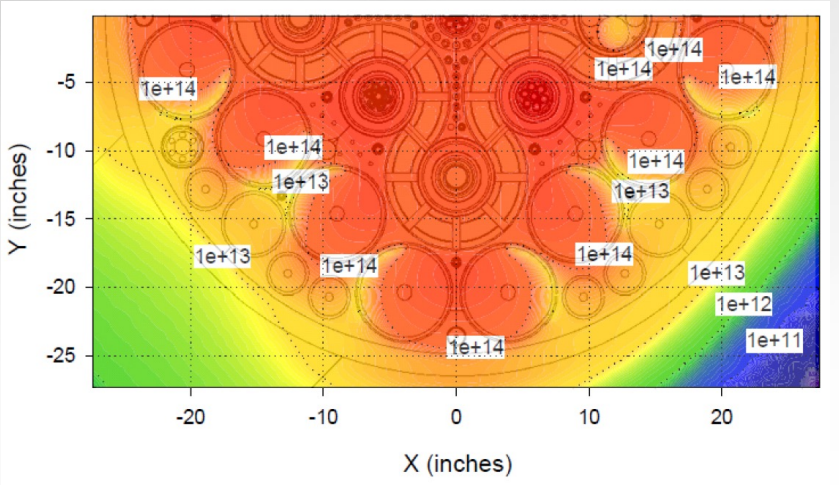

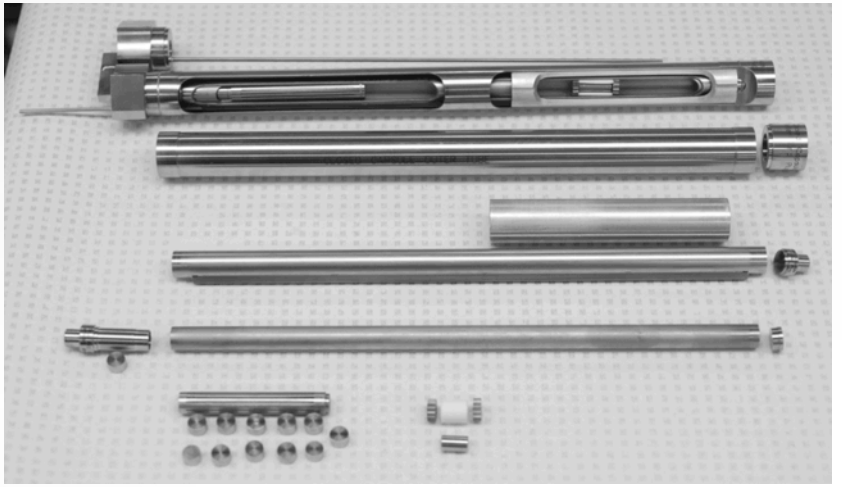

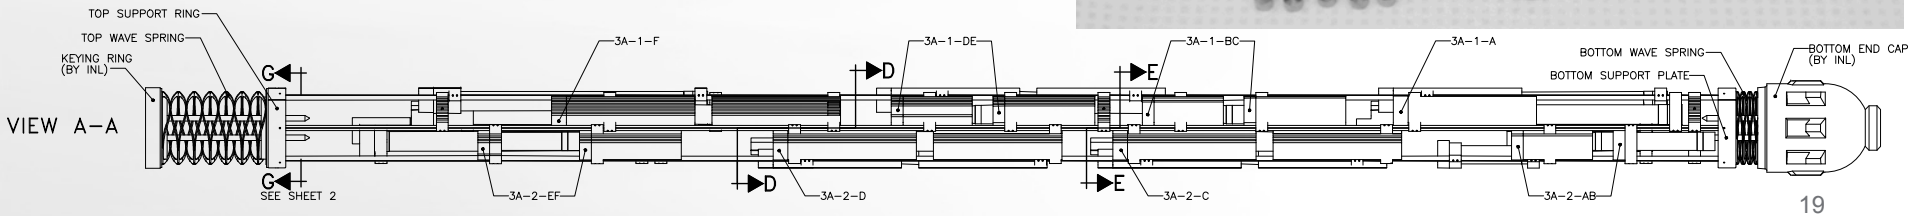

Possible Future Inclusions into PNNL Partner Facility Capability

Pacific Northwest NATIONAL LABORATORY
Proudly Operated by Battelle Since 1965

- PNNL houses the Environmental Molecular Science Laboratory, a DOE Office of Science User Facility
- EMSL (including RadEMSL capabilities below) not currently included in PNNL NSUF Partner Facility, but potentially could be in future
  - Atom probe tomography
  - Electron microprobe
  - MicroXRD
  - X-ray photoelectron spectrometer
  - NMRs for solids and liquids (100 and 750 MHz)
  - Continuous wave x-band (9.5 GHz) electron paramagnetic resonance spectrometer
  - Analytical chemistry
    - ICP-MS
    - Ion chromatography